


# HANGING BALI L

## SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	1xGU10 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,27
GROSS WEIGHT	[kg]	1,30
COLOUR (HOUSING)		WHITE ~RAL9010
COLOUR (HOUSING)		BLACK ~RAL9004



## LIGHT DISTRIBUTION (OSRAM LAMP) 36°

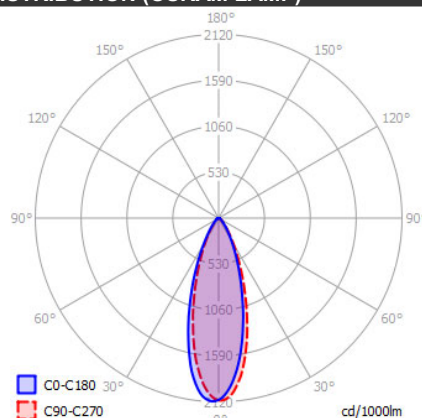

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

ANTI GLARE RING	GOLD
CEILING HOUSING FOR MULTIPLE PEDANTS LP5/ LP7/ LP8/STAR	
CABLE KIT 5	5000mm cable

## Colours




white/black

white/gold


black/black

black/gold

## MOUNTING DIMENSIONS



## FIXTURE DIMENSIONS

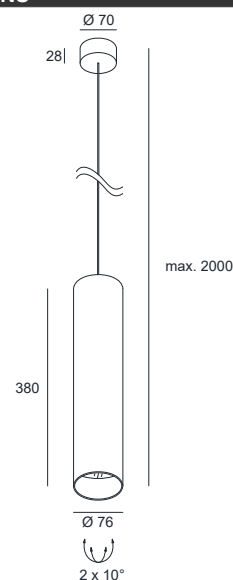

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING