

# LINEA 5

## SPECIFICATIONS


MOUNTING		CEILING RECESSED
POWER	[W]	5x2
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	5x180 / 5x190
LIGHT COLOUR	[K]	2700 / 3000
CRI		>95
BEAM ANGLE	[°]	48 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	90
POWER SUPPLY	[V] [A]	700mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,19
GROSS WEIGHT	[kg]	0,20
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	141x37
RECESSED DEPTH (H)	[mm]	55

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION


48°

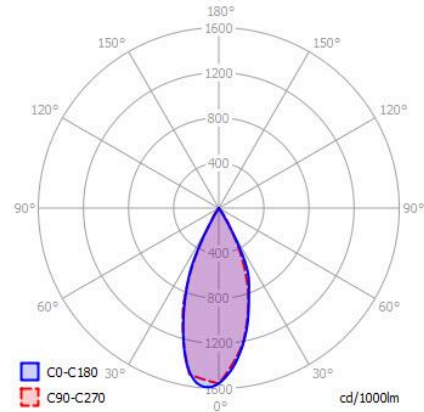

## OPTIONS / OPTIONAL ACCESSORIES

12° and 34° beam angle on request


## Colours




white

black

## CUT OUT DIMENSIONS

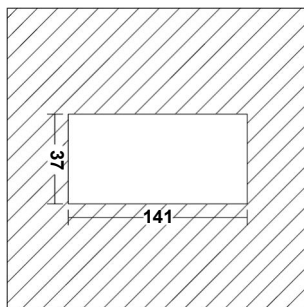

## FIXTURE DIMENSIONS

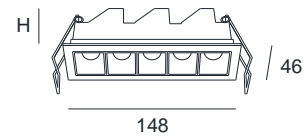

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING