

Ceiling lamp diffused light. Painted aluminium structure. Opal white methacrylate diffuser. Superior ring in methacrylate material or aluminium. LED light source integrated. Complete with electronic driver dimmable Push/Dali.

Emergency on request

| Luna 2862/M/DIM/L/1   |                                  | Data Sheet    |         |              |
|-----------------------|----------------------------------|---------------|---------|--------------|
| Family                | Luna                             |               |         |              |
| Typology              | Ceiling                          |               |         |              |
| Utilisation           | Indoor                           |               |         |              |
| Childhoff             |                                  |               | //      |              |
| Dimensions            |                                  |               |         |              |
| Height                | 12 cm                            |               | ((      | ))           |
| Diameter              | 80 cm                            |               |         | //           |
| Power supply cable    | 0 cm                             |               |         |              |
| length                |                                  |               |         |              |
| Weight                | 9 Kg                             |               |         |              |
|                       |                                  |               |         |              |
| Materials             |                                  |               |         |              |
| Structure             | aluminium                        | Diffuser      | n       | nethacrylate |
| Base                  | aluminium                        |               |         |              |
| Voltage               | 230V                             | Watt          | 79 W    |              |
| Power unit            | Included                         | Lumen         | 9100 lm |              |
| Mounting Power Supply |                                  | CRI           | >80     |              |
|                       | Internal                         | CCT<br>Energy | 3000 K  |              |
| Power supply          | Electronic dimmable power supply | class         | E       |              |
| Dimming               | Push                             |               |         |              |
|                       | Dali2                            |               |         |              |
|                       | Pot. 10KΩ                        |               |         |              |
|                       | 0-10V                            |               |         |              |
|                       | 1-10V                            |               |         |              |










## Photometric curves

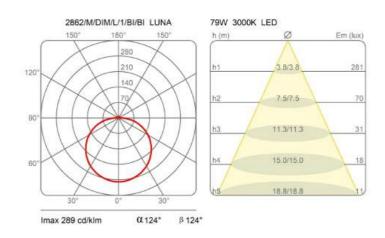

## Colour variant code



White/orange







## Gallery

