REED XL

SPECIFICATIONS

MOUNTING		TRACK
POWER	[W]	33
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	3470
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	32 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	105
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		-
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,16
GROSS WEIGHT	[kg]	1,20
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
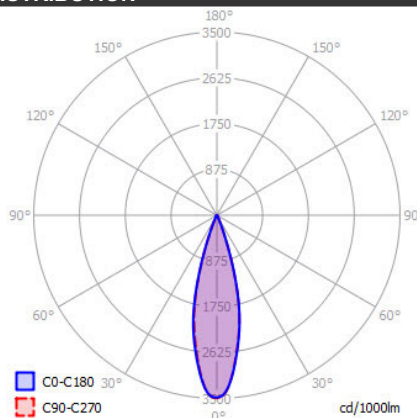
*Luminous flux values are nominal LED data at a operating temperature of 25° C

## LIGHT DISTRIBUTION 32°

☐ C0-C180
☐ C90-C270

cd/1000lm

OPTIONS / OPTIONAL ACCESSORIES

REFECTOR	[°]	15 / 50

Colours

white   black

TRACK MOUNTING

FIXTURE DIMENSIONS

350°
90°
170
Ø 95

CRI>90   IP20

DLS LIGHTING
—
www.dlslighting.com

*dLS LIGHTING