

### **Technical specifications**

Solid Downlight Cylinder Carrara marble

**Shade material** Fine-grained Carrara marble.

**Shade dimensions** Ø 88mm. H 130mm.

**Shade weight** 1100g (weight may vary)


**Ceiling fixing** See separate drawing.

**Other information** IP20 rated. Class 1.

Supply voltage: 220-240V ~ 50/60Hz

Lampholder: GU10

Lamp Type (Bulb): LED only. 8W Max.

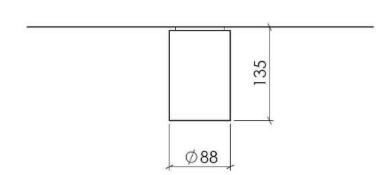

### **Technical specifications**

MEGAMAN ® PAR16 5.5W GU10 2800K Dimmable

**Reflector type** PAR16

Wattage 5.5W

**Voltage** 220-240V~ 50-60Hz

**Lamp base** GU10

Lamp life (L90) 25,000hrs

Beam angle WFL (35°)

**Colour temperature** Warm white (2800K)

Colour rendering index Ra82

Max. lumen intensity 540cd

Total luminous flux 500lm

Operating temperature -30°c to +40°c


**Diameter** 50mm

**Length** 57mm

Weight 61g

**Dimmable** 100-5%

Energy label A+



m	Lux	Ø cm
	Lux	2 0111
0.5	2160	32
1	540	63
1.5	240	95
2	135	126



### **Technical specifications**

Solid Downlight Cylinder Nero Marquina marble

**Shade material** Fine-polished Nero Marquina marble.

**Shade dimensions** Ø 88mm. H 130mm.

**Shade weight** 1100g (weight may vary)


**Ceiling fixing** See separate drawing.

**Other information** IP20 rated. Class 1.

Supply voltage: 220-240V ~ 50/60Hz

Lampholder: GU10

Lamp Type (Bulb): LED only. 8W Max.

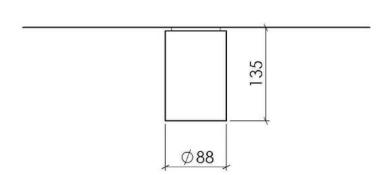

### **Technical specifications**

MEGAMAN ® PAR16 5.5W GU10 2800K Dimmable

**Reflector type** PAR16

Wattage 5.5W

**Voltage** 220-240V~ 50-60Hz

**Lamp base** GU10

Lamp life (L90) 25,000hrs

Beam angle WFL (35°)

**Colour temperature** Warm white (2800K)

Colour rendering index Ra82

Max. lumen intensity 540cd

Total luminous flux 500lm

Operating temperature -30°c to +40°c


**Diameter** 50mm

**Length** 57mm

Weight 61g

**Dimmable** 100-5%

Energy label A+



m	Lux	Ø cm
		~ 3111
0.5	2160	32
1	540	63
1.5	240	95
2	135	126



### **Technical specifications**

Solid Downlight Cylinder

Natural Oak

**Shade material** European Oak, lacquered matt.

**Shade dimensions** Ø 88mm. H 130mm.

**Shade weight** 275g (weight may vary)


**Ceiling fixing** See separate drawing.

**Other information** IP20 rated. Class 1.

Supply voltage: 220-240V ~ 50/60Hz

Lampholder: GU10

Lamp Type (Bulb): LED only. 8W Max.

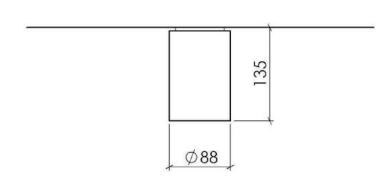

### **Technical specifications**

MEGAMAN ® PAR16 5.5W GU10 2800K Dimmable

**Reflector type** PAR16

Wattage 5.5W

**Voltage** 220-240V~ 50-60Hz

**Lamp base** GU10

Lamp life (L90) 25,000hrs

Beam angle WFL (35°)

**Colour temperature** Warm white (2800K)

Colour rendering index Ra82

Max. lumen intensity 540cd

Total luminous flux 500lm

Operating temperature -30°c to +40°c


**Diameter** 50mm

**Length** 57mm

Weight 61g

**Dimmable** 100-5%

Energy label A+



m	Lux	Ø cm
		~ 3111
0.5	2160	32
1	540	63
1.5	240	95
2	135	126



### **Technical specifications**

Solid Downlight Cylinder Black Stained Oak

**Shade material** Black stained European Oak, lacquered matt.

**Shade dimensions** Ø 88mm. H 130mm.

**Shade weight** 275g (weight may vary)


**Ceiling fixing** See separate drawing.

**Other information** IP20 rated. Class 1.

Supply voltage: 220-240V ~ 50/60Hz

Lampholder: GU10

Lamp Type (Bulb): LED only. 8W Max.

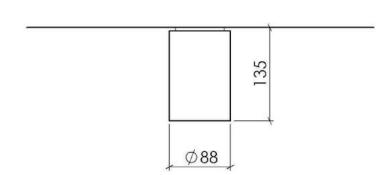

### **Technical specifications**

MEGAMAN ® PAR16 5.5W GU10 2800K Dimmable

**Reflector type** PAR16

Wattage 5.5W

**Voltage** 220-240V~ 50-60Hz

**Lamp base** GU10

Lamp life (L90) 25,000hrs

Beam angle WFL (35°)

**Colour temperature** Warm white (2800K)

Colour rendering index Ra82

Max. lumen intensity 540cd

Total luminous flux 500lm

Operating temperature -30°c to +40°c


**Diameter** 50mm

**Length** 57mm

Weight 61g

**Dimmable** 100-5%

Energy label A+



m	Lux	Ø cm
		~ 3111
0.5	2160	32
1	540	63
1.5	240	95
2	135	126



### **Technical specifications**

Solid Downlight Cylinder

Walnut

**Shade material** American black Walnut, lacquered matt.

**Shade dimensions** Ø 88mm. H 130mm.

**Shade weight** 450g (weight may vary).


**Ceiling fixing** See separate drawing.

**Other information** IP20 rated. Class 1.

Supply voltage: 220-240V ~ 50/60Hz

Lampholder: GU10

Lamp Type (Bulb): LED only. 8W Max.

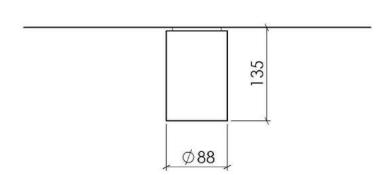

### **Technical specifications**

MEGAMAN ® PAR16 5.5W GU10 2800K Dimmable

**Reflector type** PAR16

Wattage 5.5W

**Voltage** 220-240V~ 50-60Hz

**Lamp base** GU10

Lamp life (L90) 25,000hrs

Beam angle WFL (35°)

**Colour temperature** Warm white (2800K)

Colour rendering index Ra82

Max. lumen intensity 540cd

Total luminous flux 500lm

Operating temperature -30°c to +40°c


**Diameter** 50mm

**Length** 57mm

Weight 61g

**Dimmable** 100-5%

Energy label A+



m	Lux	Ø cm
0.5	2160	32
1	540	63
1.5	240	95
2	135	126