

SUPREME 60


SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	10
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1305
LIGHT COLOUR	[K]	3000
CRI		>80
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	130
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ACRYLIC GLASS
INGRESS PROTECTION		IP44
PROTECTION CLASS		II
NET WEIGHT	[kg]	1,01
GROSS WEIGHT	[kg]	1,05
COLOUR (HOUSING)		POLISHED STAINLESS STEEL

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

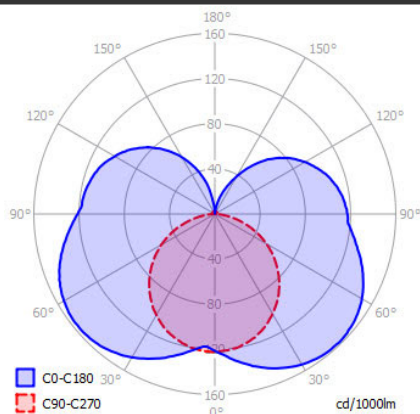


OPTIONS / OPTIONAL ACCESSORIES

Colours





stainless steel
polished

MOUNTING DIMENSIONS (DRILLING TEMPLATE)

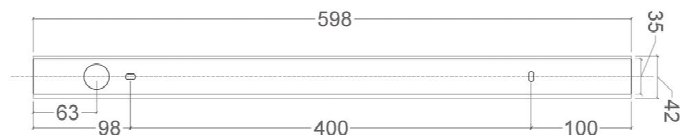

FIXTURE DIMENSIONS

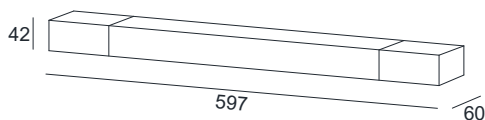

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

SUPREME 100


SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	14
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1660
LIGHT COLOUR	[K]	3000
CRI		>80
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	118
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ACRYLIC GLASS
INGRESS PROTECTION		IP44
PROTECTION CLASS		II
NET WEIGHT	[kg]	1,45
GROSS WEIGHT	[kg]	1,50
COLOUR (HOUSING)		POLISHED STAINLESS STEEL

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

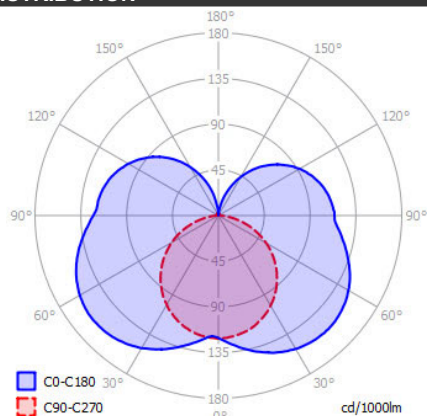


OPTIONS / OPTIONAL ACCESSORIES

Colours





stainless steel
polished

MOUNTING DIMENSIONS (DRILLING TEMPLATE)

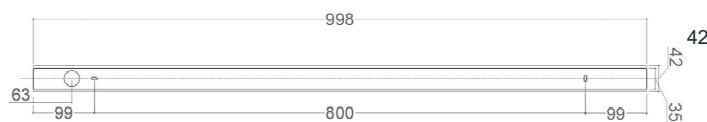

FIXTURE DIMENSIONS

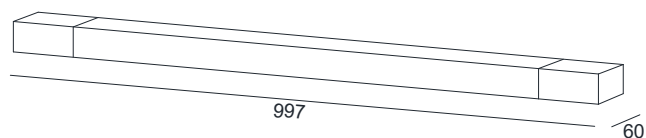

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

SUPREME 130


SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	18
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2135
LIGHT COLOUR	[K]	3000
CRI		>80
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	118
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ACRYLIC GLASS
INGRESS PROTECTION		IP44
PROTECTION CLASS		II
NET WEIGHT	[kg]	1,74
GROSS WEIGHT	[kg]	1,80
COLOUR (HOUSING)		POLISHED STAINLESS STEEL

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

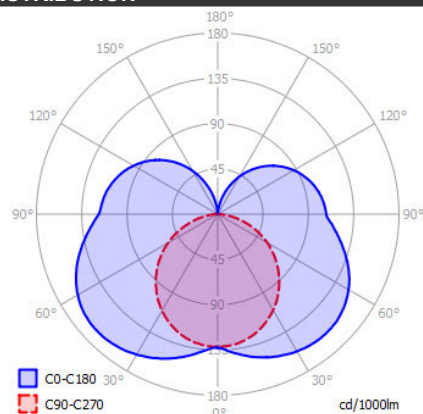


OPTIONS / OPTIONAL ACCESSORIES

Colours





stainless steel
polished

MOUNTING DIMENSIONS (DRILLING TEMPLATE)



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING